MMD24

dacor The Life of the Kitchen®

24” Microwave In-A-Drawer™

PLANNING GUIDE

All tolerances: +1/16”, -0, (+1.6mm, -0) unless otherwise stated

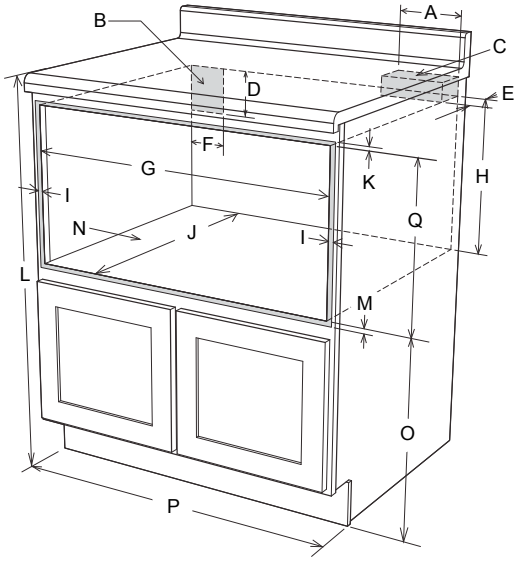

A. 6"
B. Electrical outlet location
C. Anti-tip block
D. 5"
E. 3 1/2"
F. 4"
G. 22 1/4" opening
H. 14 3/16" to bottom of anti-tip block
I. Allow 7/8" minimum overlap
J. 23 1/2" minimum depth
K. Allow 3/16" minimum overlap
L. 36" nominal countertop height
M. Allow 7/16" minimum overlap
N. Floor must support 100 lbs. minimum
O. 19" to top of floor (recommended)
P. 24" cabinet minimum
Q. 15 3/16" ± 1/16" opening

NOTE: Open top cabinet illustrated

CUTOUT DIMENSIONS

⚠ WARNING

- ◊ Observe all governing codes and ordinances during planning and installation. Contact your local building department for further information.
- ◊ This appliance must be installed in accordance with the accompanying installation instructions.

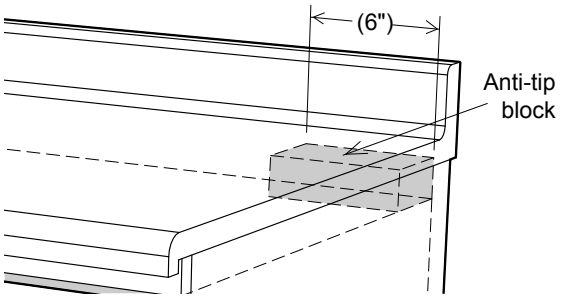

ANTI-TIP BLOCK LOCATION

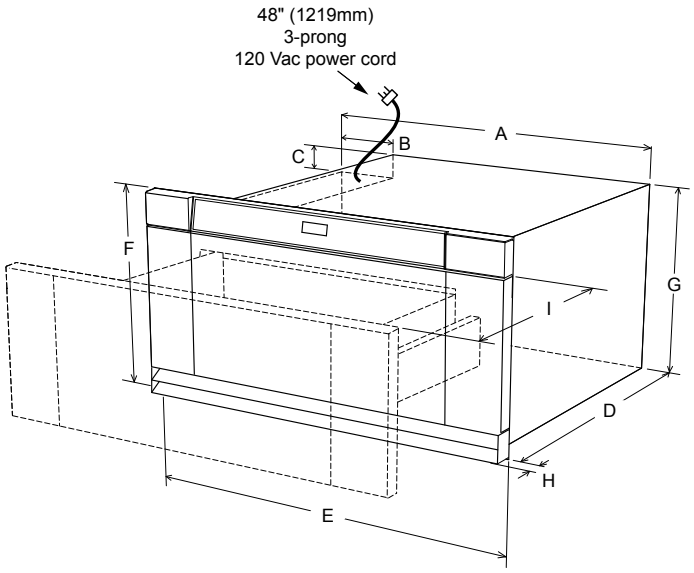

A. 21 19/32"
B. 4 11/16"
C. 1 23/32"
D. 23 3/8"
E. 23 13/16"
F. 15 5/8"
G. 15 1/16"
H. 1" door thickness
I. 15" auto drawer opening

OVERALL DIMENSIONS

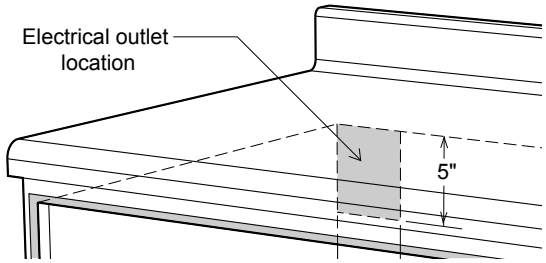

ELECTRICAL UTILITY LOCATION

NOTES:

1. **Spacing between appliances and doors/drawers is minimum required to allow for ventilation and to prevent scraping. Additional space may be required for appearance.**

Dedicated Circuit Required	Total Connected Load
120 Vac, 60 Hz, 15 Amp. 3-wire grounded, electrical outlet	13 Amp. @ 120 Vac, 60 Hz

ELECTRICAL SPECIFICATIONS